

Installation (70817、71407)

Installation

IMPORTANT ! - Electrical connections must be carried out by a qualified person and in accordance with all relevant local building and installation regulations. If in doubt consult a qualified electrician

Installation

1. Switch off the power.
2. Saw a hole with diameter 64 mm in the ceiling where the downlight will be installed. Lead the installation wires through the hole (Fig 1).
3. Open the connection box of the downlight (Fig 2).
4. Strip approximately 6-8mm insulating part of the wires from the power cord.
Lead the power wires through the rubber isolation tube (Fig 3) and connect them to the terminal block. Inside the box are markings for the live wire "L" and the neutral wire "N". Ensure that the gasket at the end of the rubber tube is in place (Fig 4).
6. Close the connection box (Fig 5).

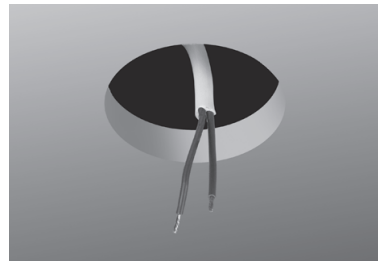


Fig 1

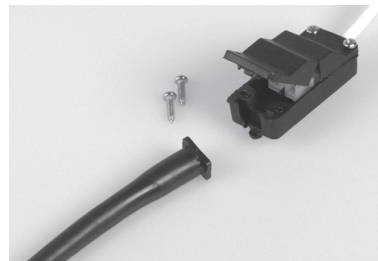


Fig 2

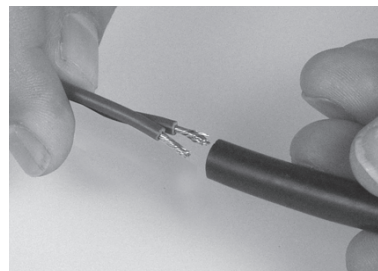


Fig 3

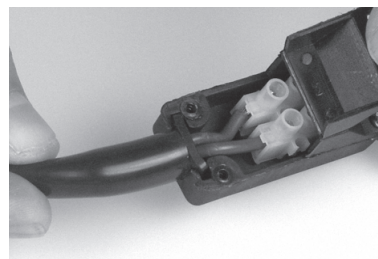


Fig 4

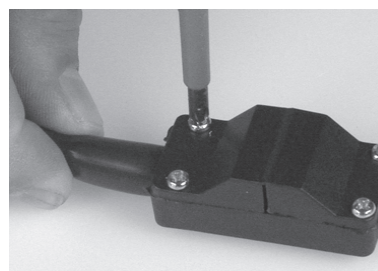


Fig 5

Installation

Installation

7. Fix the metal strip to the side of the downlight (Fig 6).
8. Click the connection box on the metal strip (Fig 7).
9. Turn left with the tool to open the front ring. (Fig 8)
10. Insert the bulb. (Fig 9)
11. Turn right with the tool to lock the front ring (Fig 10)
12. Insert the metal strip in the hole in the ceiling (Fig 11).
13. Pinch the two leaf springs and insert the downlight in the hole. Release the springs and push until the downlight is in place.

ATTENTION!

Leave at least 10 cm of free space around the bulb above the ceiling (Fig 13).

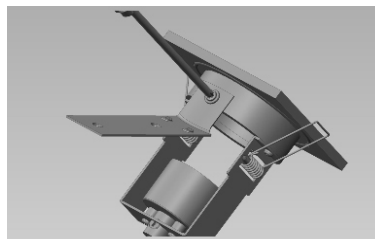


Fig 6

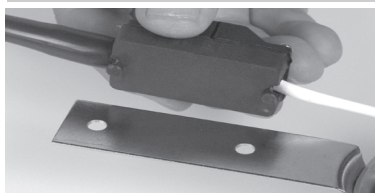


Fig 7



Fig 8

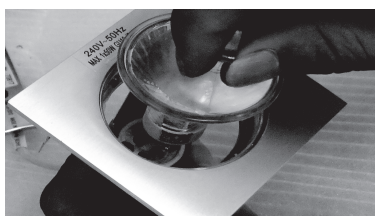


Fig 9



Fig 10

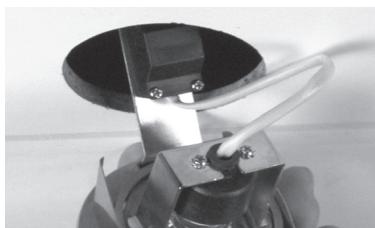


Fig 11

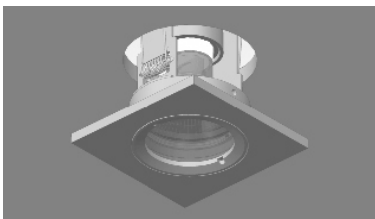


Fig 12

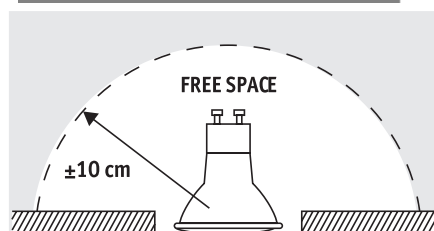


Fig 13